Haines Borough

HAINES GYM, POOL, & CHILKAT CENTER DOORS & HAINES GYM MAT HOIST

Haines, Alaska
June 7, 2013

ARCHITECT
JENSEN YORBA LOTT, INC
522 WEST 10TH STREET
JUNEAU, ALASKA 99801
(907) 586-1070
FAX (907) 586-3959

STRUCTURAL ENGINEER
PND ENGINEERS, INC.
9360 GLACIER HIGHWAY, SUITE 100
JUNEAU, ALASKA 99801
(907) 586-2093
FAX (907) 586-2099

SHEET INDEX

A001	COVER SHEET
A201	GYM – KEY, DEMOLITION, & RENOVATION FLOOR PLANS
A202	POOL – KEY, DEMOLITION, & RENOVATION FLOOR PLANS
A203	CHILKAT CENTER – KEY, DEMOLITION, & RENOVATION FLOOR PLANS
A204	DOOR TYPES, DETAILS, HARDWARE & DOOR SCHEDULE
A205	GYM FLOOR PLAN

GENERAL NOTES

1. CONTRACTOR TO FIELD VERIFY DIMENSIONS PRIOR TO MATERIAL ORDER.

2. PROVIDE PRODUCT SUBMITTALS FOR REVIEW & RECEIVE APPROVAL PRIOR TO MATERIAL ORDER.

CODE DATA

TABLE 1018.1
1. HIGH SCHOOL GYM DOORS: OCCUPANCY A OCCUPANT LOAD >30 WITH SPRINKLER – 0 RATING
2. POOL DOORS: OCCUPANCY A OCCUPANT LOAD > 30 WITH SPRINKLER – 0 RATING
3. CHILKAT CENTER DOORS: OCCUPANCY A OCCUPANT LOAD > 30 WITH SPRINKLER – 0 RATING
DOORS SWING OUT.

ABBREVIATIONS

∠	ANGLE
AC	ASPHALT CONCRETE
ACM	ASBESTOS CONTAINING MATERIAL
ACP	ACOUSTICAL CEILING PANEL
ADJ	ADJUSTABLE
AFF	ABOVE FINISH FLOOR
AIB	AIR INFILTRATION BARRIER
AL	ALUMINUM
APPROX	APPROXIMATE
ARCH	ARCHITECTURAL
ASB	ASBESTOS
BD	BOARD
BLDG	BUILDING
BLKG	BLOCKING
BM	BEAM
BOT	BOTTOM
CAB	CABINET
CB	CATCH BASIN
CEM	CEMENT
CG	CORNER GUARD
CI	CAST IRON
CLG	CEILING
COL	COLUMN
CONC	CONCRETE
CONT	CONTINUOUS
CTR	CENTER
CTSK	COUNTERSUNK
DBL	DOUBLE
DEPT	DEPARTMENT
DF	DRINKING FOUNTAIN
DET	DETAIL
DIA	DIAMETER
DIM	DIMENSION
DISP	DISPENSER
DN	DOWN
DR	DOOR
DS	DOWNSPOUT
DWG	DRAWING
DWR	DRAWER
EA	EACH
EF	EXHAUST FAN
EFIS	EXTERIOR INSULATION & FINISH SYSTEM
EJ	EXPANSION JOINT
EL	ELEVATION
ELEC	ELECTRICAL
ELEV	ELEVATOR
EMER	EMERGENCY
ENCL	ENCLOSURE
EPDM	ETHYLENE PROPYLENE DIANE MONOMER
EPS	EXPANDED POLYSTYRENE
EQ	EQUAL
EQP	EQUIPMENT
EX	EXISTING
EXT	EXTERIOR
FA	FIRE ALARM
FD	FLOOR DRAIN
FDN	FOUNDATION
FEC	FIRE EXTINGUISHER CABINET
FF	FINISH FLOOR
FHC	FIRE HOSE CABINET
FIN	FINISH
FLASH	FLASHING
FLR	FLOOR
FOC	FACE OF CONCRETE/CURB
FOF	FACE OF FINISH
FOS	FACE OF STUD
FRP	(GLASS) FIBER REINFORCED PLASTIC
FR	FIRE RETARDANT
FT	FOOT OR FEET
FTG	FOOTING
FURR	FURRING
GA	GAUGE
GALV	GALVANIZED
GB	GRAB BAR
GL	GLASS
GWB	GYPSUM WALL BOARD
GYP	GYPSUM
HB	HOSE BIBB
HDWD	HARDWOOD
HM	HOLLOW METAL
HORIZ	HORIZONTAL
HR	HOUR
HT	HEIGHT
HW	HOT WATER
ID	INSIDE DIAMETER
INSUL	INSULATION
INT	INTERIOR
JAN	JANITOR
JT	JOINT
LAB	LABORATORY
LAM	LAMINATE
LAV	LAVATORY
LB	POUND
LT	LIGHT
MIR	MIRROR
MAX	MAXIMUM
MDO	MEDIUM DENSITY OVERLAID
MECH	MECHANICAL
MEMB	MEMBRANE
MFR	MANUFACTURER
MH	MANHOLE
MIN	MINIMUM
MISC	MISCELLANEOUS
MTD	MOUNTED
MTL	METAL
MUL	MULLION
NIC	NOT IN CONTRACT
NO OR #	NUMBER
NOM	NOMINAL
NTS	NOT TO SCALE
OA	OVERALL
OC	ON CENTER
OD	OUTSIDE DIAMETER
OFCI	OWNER FURNISHED CONTRACTOR INSTALLED
OFOI	OWNER FURNISHED OWNER INSTALLED
OFD	OVERFLOW DRAIN
OFF	OFFICE
OPNG	OPENING
OPP	OPPOSITE
OSB	ORIENTED STRAND BOARD
PL	PLATE
PLAM	PLASTIC LAMINATE
PLAS	PLASTER
PC	PRE-CAST
PF	PRE-FINISHED
PR	PAIR
PWD	PLYWOOD
R	RISER
RAD	RADIUS
RD	ROOF DRAIN
REF	REFERENCE
REFR	REFRIGERATOR
REINF	REINFORCED
REQ	REQUIRED
RESIL	RESILIENT
RH	ROBE HOOK
RL	RAIN LEADER
RM	ROOM
RO	ROUGH OPENING
RUB	RUBBER
SASU	SELF ADHERING SHEET UNDERLAYMENT
SCD	SEAT COVER DISPENSER
SCHED	SCHEDULE
SF	SQUARE FOOT
SFRM	SPRAYED FIRE-RESISTIVE MATERIAL
SHR	SHOWER
SHTH	SHEATHING
SIM	SIMILAR
SND	SANITARY NAPKIN DISPENSER
SNR	SANITARY NAPKIN RECEPTACLE
SPEC	SPECIFICATIONS
SQ	SQUARE
SQFT	SQUARE FOOT
SQYD	SQUARE YARD
STA	STATION
STC	SOUND TRANSMISSION CLASS
STD	STANDARD
STL	STEEL
STOR	STORAGE
STRUCT	STRUCTURAL
SS	STAINLESS STEEL
SUSP	SUSPENDED
SY	SQUARE YARD
TB	TOWEL BAR
TC	TOP OF CURB
TEL	TELEPHONE
TEMP	TEMPORARY
T&G	TONGUE & GROOVE
TOC	TOP OF CONCRETE
TOD	TOP OF DECK
TPD	TOILET PAPER DISPENSER
TRD	TREAD
TRTD	PRESSURE TREATED
TOW	TOP OF WALL
TYP	TYPICAL
UL	UNDERWRITERS LABORATORIES
UNF	UNFINISHED
UON	UNLESS OTHERWISE NOTED
UR	URINAL
VERT	VERTICAL
VEST	VESTIBULE
VR	VAPOR RETARDER
VTR	VENT THROUGH ROOF
WB	WEATHER BARRIER
WC	WATER CLOSET
WD	WOOD
WP	WATERPROOF
WR	WASTE RECEPTACLE
WSCT	WAINSCOT
WT	WEIGHT
WWF	WELDED WIRE FABRIC

SYMBOLS

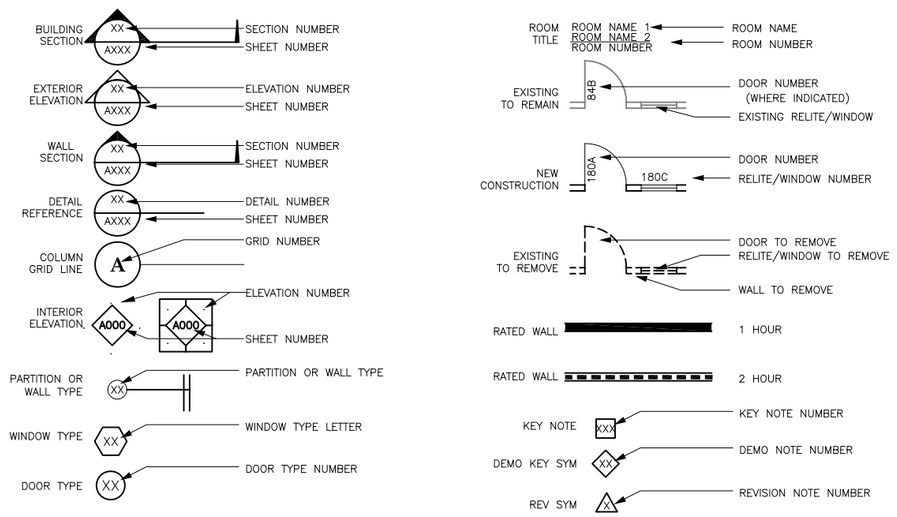

STATE OF ALASKA
JOANN E. LOTT
Jun. 7, 13
NO. AR006
REGISTERED PROFESSIONAL ARCHITECT

Jensen Yorba Lott Inc.
522 West 10th Street
Juneau, Alaska 99801
phone 907-586-1070
fax 907-586-3959
jensenyorbalott.com

FILE: 13008

A001

KEY NOTES:

1. EX WOOD GYM FLOOR
2. EX CARPET
3. EX CONCRETE WALL
4. REMOVE DOOR, HM FRAME & DOOR HARDWARE
5. SALVAGE THRESHOLD FOR REUSE
6. REPLACE DOOR, FRAME & HARDWARE –SEE DOOR SCHEDULE (A204)
7. REINSTALL EX THRESHOLD

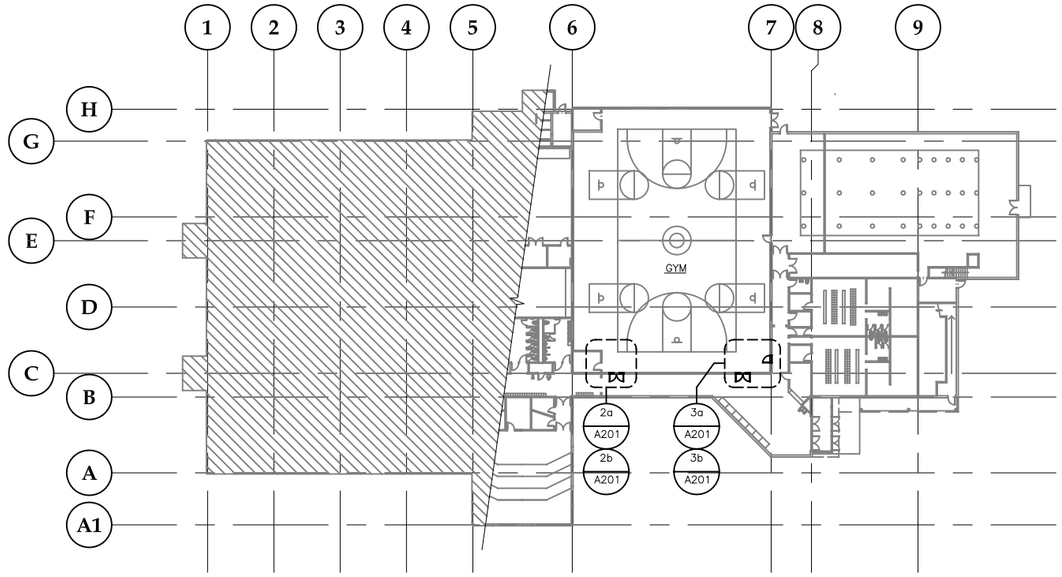

1 **FIRST FLOOR KEY PLAN**

SCALE: 0 16' 32' 64'

PROJECT NORTH

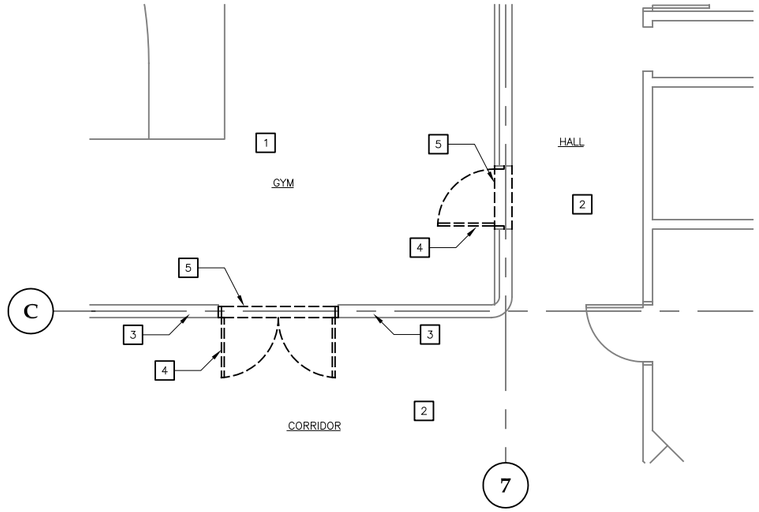

3a **ENLARGED FIRST FLOOR DEMOLITION PLAN**

SCALE: 0 2' 4' 8'

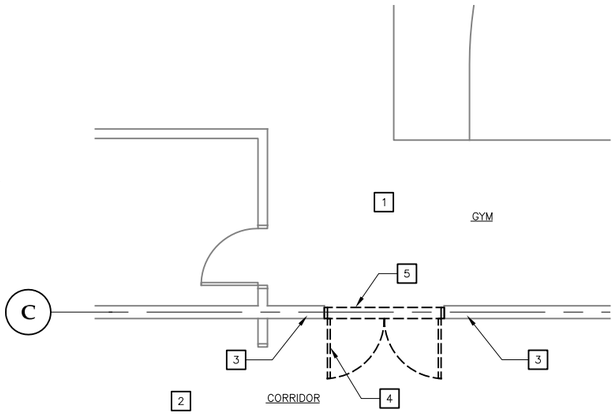

2a **FIRST FLOOR DEMOLITION PLAN**

SCALE: 0 2' 4' 8'

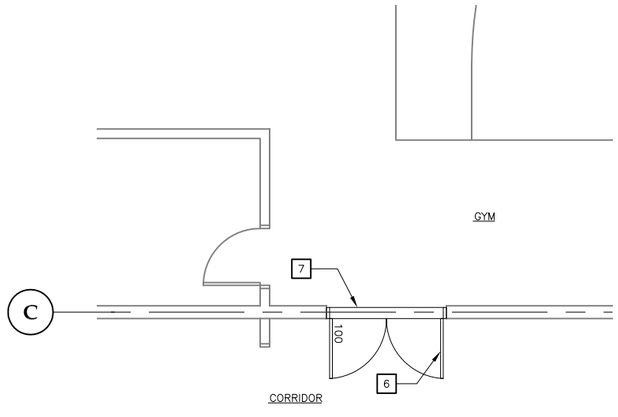

2b **FIRST FLOOR PLAN**

SCALE: 0 2' 4' 8'

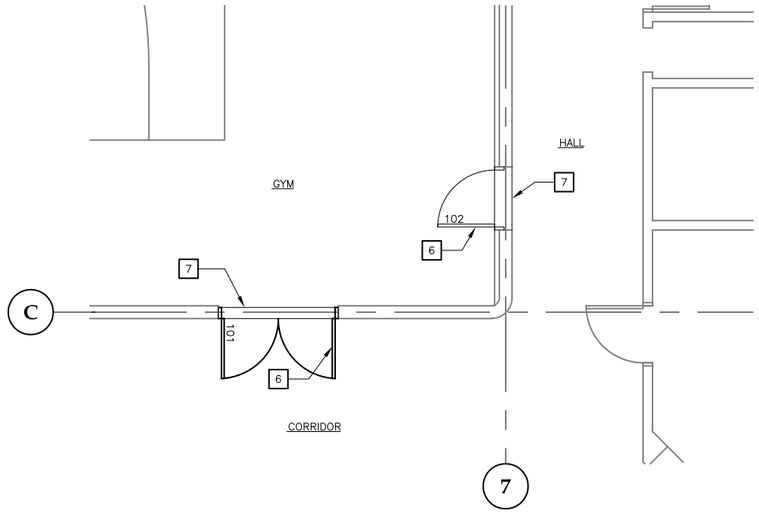

3b **ENLARGED FIRST FLOOR PLAN**

SCALE: 0 2' 4' 8'

Jensen Yorba Lott Inc.

522 West 10th Street
Juneau, Alaska 99801
phone 907-586-1070
fax 907-586-3959
jensenyorbalott.com

STATE OF ALASKA
JOANN E. LOTT
Jun. 7, 13
REGISTERED PROFESSIONAL ARCHITECT

Haines Borough
HAINES GYM, POOL, & CHILKAT CENTER DOORS & HAINES GYM MAT HOIST
Haines, Alaska

REVISIONS
1 .
2 .
3 .

SHEET TITLE
GYM - KEY, DEMOLITION & RENOVATION FLOOR PLANS

DATE: 06-07-2013
FILE: 13008

A201

KEY NOTES:

1. REMOVE DOOR FRAME
2. REMOVE WALL
3. REMOVE FLOOR FINISHES
4. TYPICAL PARTITION WALL WHERE SHOWN
   –FROM FLOOR TO 8'–6" SOFFIT
   –2x4 @ 16"oc w/ TOP & BOTTOM PLATE
   –5/8" TYPE X GWB EA SIDE (PT)
5. DOOR & FRAME
   –SEE DOOR SCHEDULE (A204)
6. PATCH FLOOR w/CARPET
7. EX ACP & STL SUSPENSION GRID
8. RELOCATE EX THERMOSTAT TO ADJACENT WALL
9. CUT & PATCH ACP/CEILING GRID & EXTEND TO NEW WALL LOCATION
10. PT WALL FLOOR CEILING & CORNER TO CORNER
    –1 PRIMER COAT
    –2 TOP COATS
    –BENJAMIN MOORE
      –LATEX
      –REGAL SELECT
      –PEARL

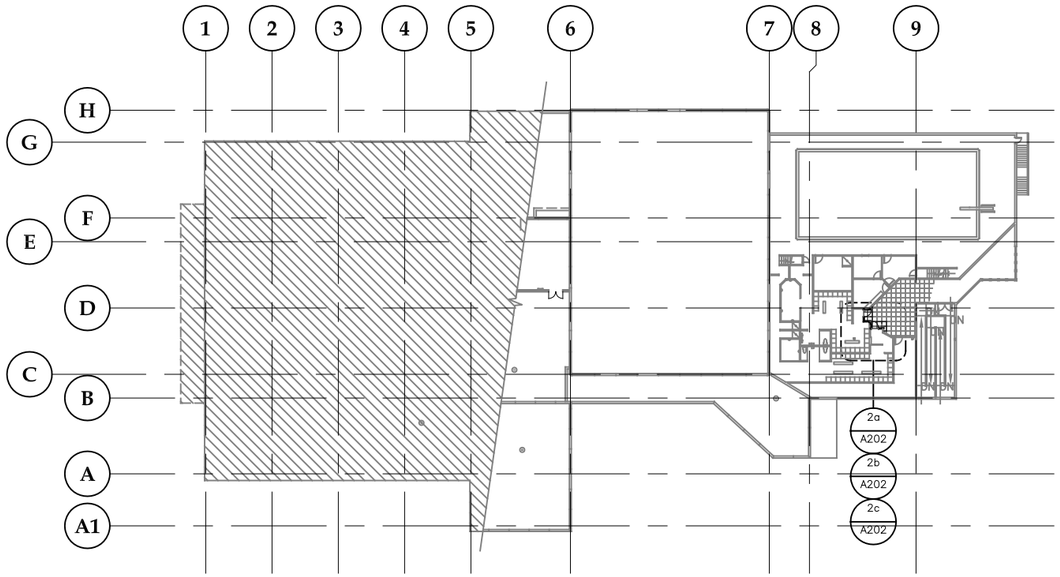

1 HAINES SCHOOL POOL SECOND FLOOR KEY PLAN
SCALE: 0 16' 32' 64'

PROJECT NORTH

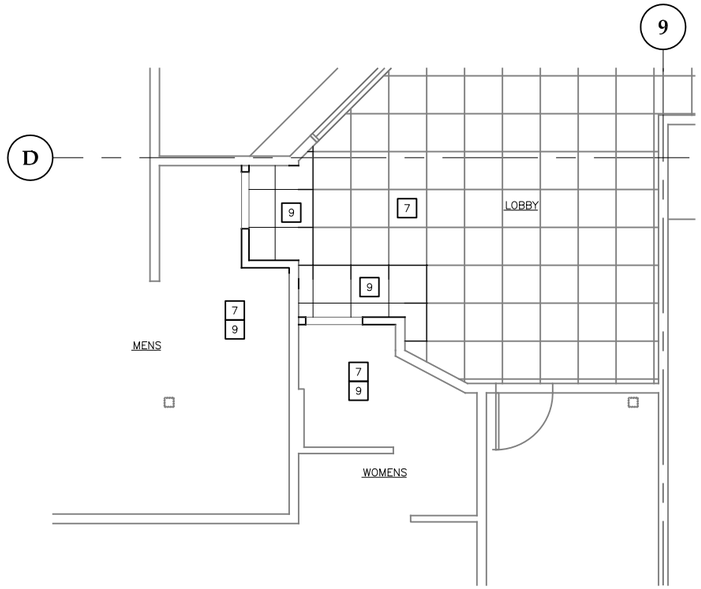

2C FIRST FLOOR REFLECTED CEILING PLAN
SCALE: 0 2' 4' 8'

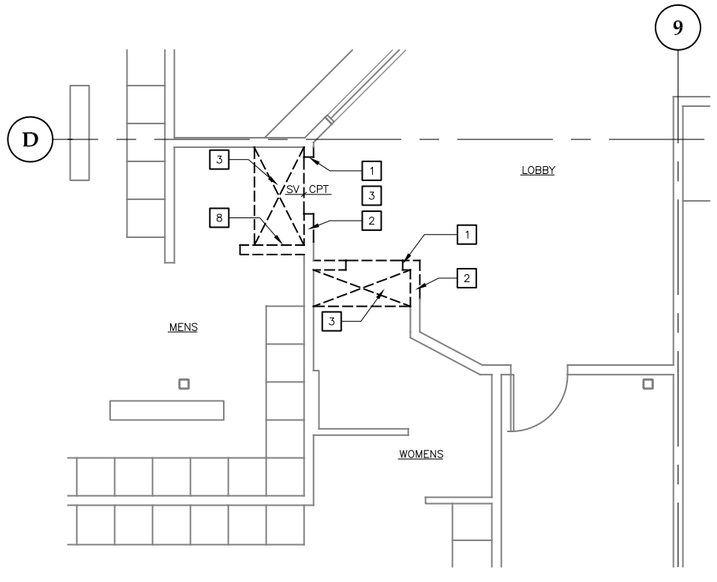

2a FIRST FLOOR DEMOLITION PLAN
SCALE: 0 2' 4' 8'

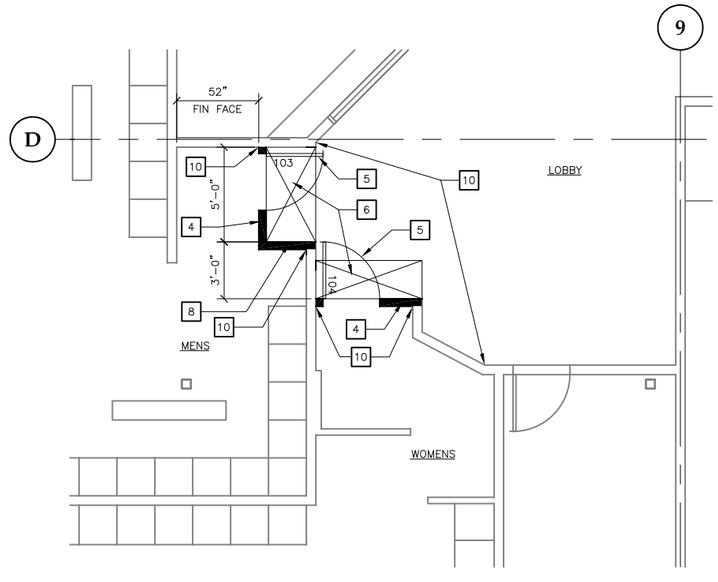

2b FIRST FLOOR PLAN
SCALE: 0 2' 4' 8'

Jensen Yorba Lott Inc.
522 West 10th Street
Juneau, Alaska 99801
phone 907-586-1070
fax 907-586-3959
jensenyorbalott.com

STATE OF ALASKA
JOANN E. LOTT
Jun. 7, 13
NO. AK BOE
REGISTERED PROFESSIONAL ARCHITECT

Haines Borough
HAINES GYM, POOL, & CHILKAT CENTER DOORS & HAINES GYM MAT HOIST
Haines, Alaska

REVISIONS
1 .
2 .
3 .

SHEET TITLE
POOL - KEY, DEMOLITION & RENOVATION FLOOR PLANS

DATE: 06-07-2013
FILE: 13008

A202

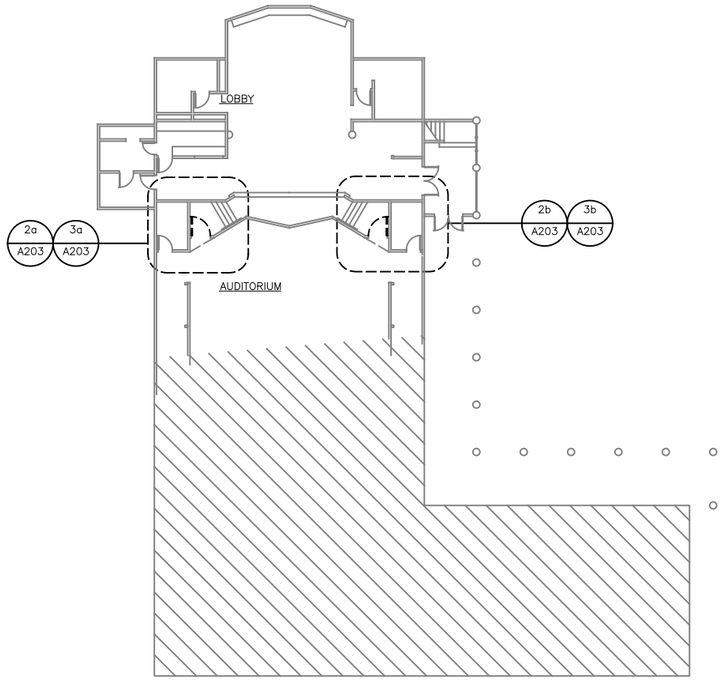

1 FIRST FLOOR KEY PLAN
SCALE: 0 16' 32' 64'

PROJECT NORTH

KEY NOTES:

1. REMOVE DOOR & FRAME
2. DOOR & FRAME (SEE SCHEDULE)
3. REMOVE WALL MOUNTED WD DOOR HOLDER –PATCH WALL & PT
4. PT WALL –SEE KEY NOTE 10 ON A202

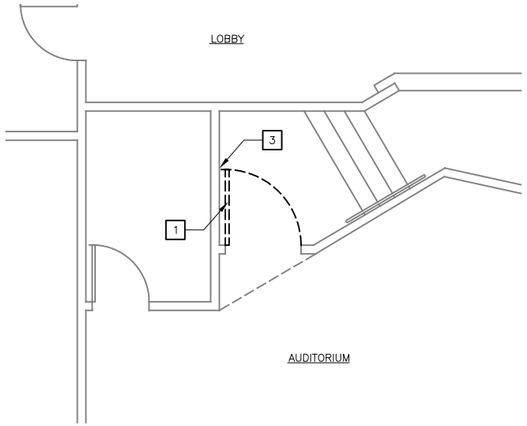

2a FIRST FLOOR DEMOLITION PLAN
SCALE: 0 2' 4' 8'

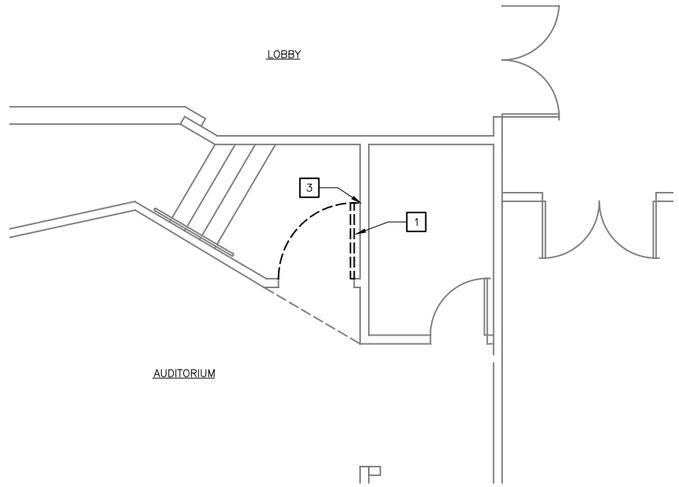

2b FIRST FLOOR DEMOLITION PLAN
SCALE: 0 2' 4' 8'

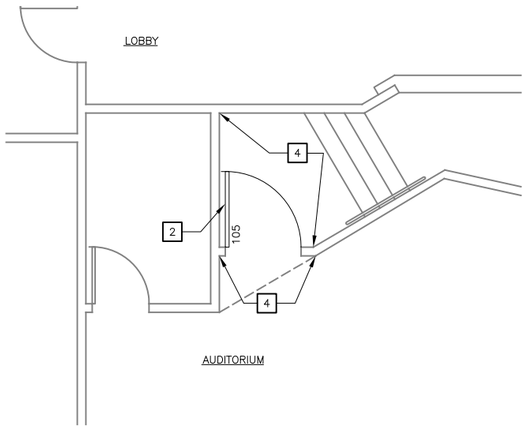

3a FIRST FLOOR PLAN
SCALE: 0 2' 4' 8'

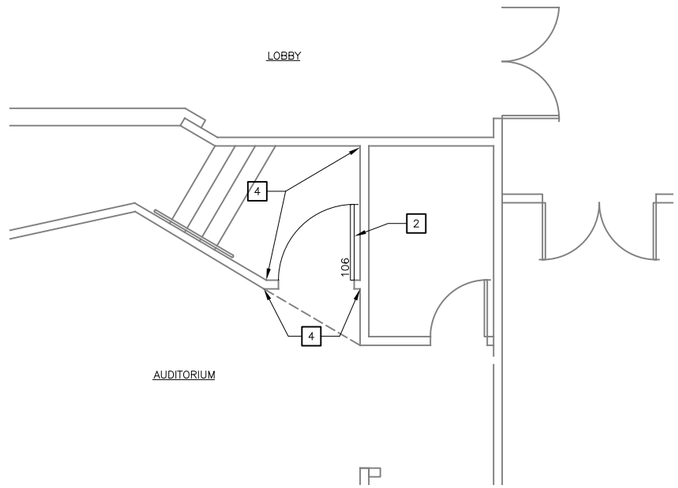

3b FIRST FLOOR PLAN
SCALE: 0 2' 4' 8'

Jensen Yorba Lott Inc.
522 West 10th Street
Juneau, Alaska 99801
phone 907-586-1070
fax 907-586-3959
jensenyorbalott.com

STATE OF ALASKA
JOANN E. LOTT
Jun. 7, 13
REGISTERED PROFESSIONAL ARCHITECT

Haines Borough
HAINES GYM, POOL, & CHILKAT CENTER DOORS & HAINES GYM MAT HOIST
Haines, Alaska

REVISIONS
1 .
2 .
3 .

SHEET TITLE
CHILKAT CENTER - KEY, DEMOLITION & RENOVATION FLOOR PLANS

DATE: 06-07-2013
FILE: 13008

A203

DOOR TYPES

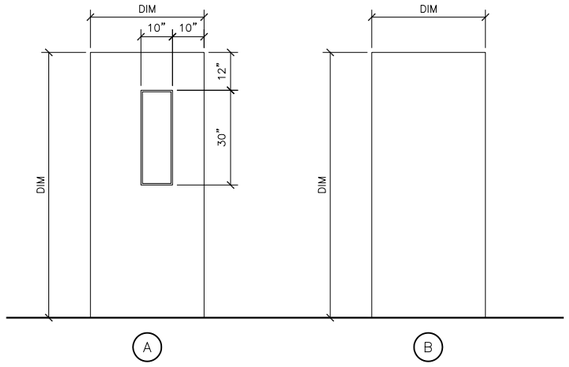

DOOR SCHEDULE

OPENING No.	Type	Size	DOOR Mat.	Fin.	FRAME Mat.	Fin.	GLASS	RATING	DETAILS Head	Jamb	Sill	HW	REMARKS
100	A	PR 3'-0" x 6'-9 3/4"	WD	PF	HM	PT	X		1/A204 SIM	1/A204	2/A204	1	NOTE A
101	A	PR 3'-0" x 6'-9 3/4"	WD	PF	HM	PT	X		1/A204 SIM	1/A204	2/A204	1	"
102	A	3'-8" x 6'-10 1/2"	WD	PF	HM	PT	X		1/A204 SIM	1/A204	2/A204	2	"
103	B	3'-0" x 7'-0"	WD	PF	HM	PT	-		3/A204	3/A204 SIM	-	3	"
104	B	3'-0" x 7'-0"	WD	PF	HM	PT	-		3/A204	3/A204 SIM	-	3	"
105	A	4'-0" x 6'-8"	WD	PF	HM	PT	X		4/A204	4/A204 SIM	-	4	"
106	A	4'-0" x 6'-8"	WD	PF	HM	PT	X		4/A204	4/A204 SIM	-	4	"
											-		"

ABBREVIATIONS

HM - HOLLOW METAL
PF - PRE-FINISHED
PT - PAINT
WD - WOOD

NOTE A: SITE VERIFY WALL THICKNESS

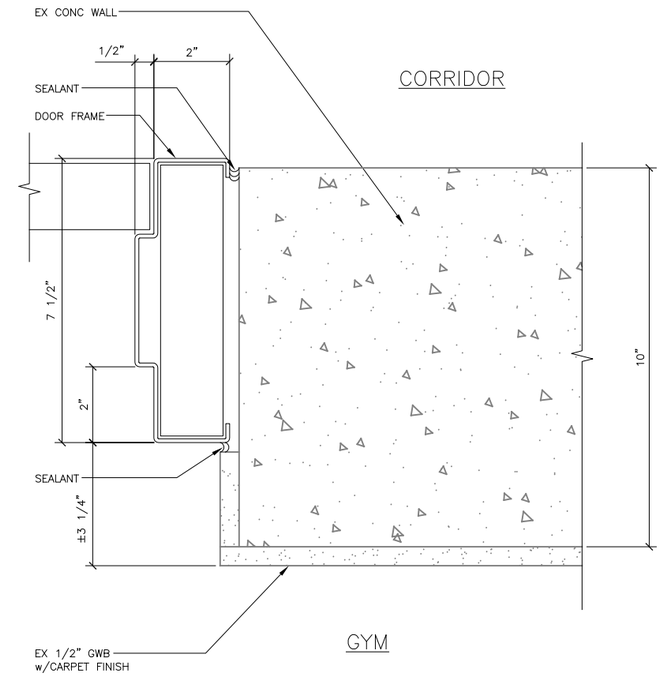

1 **GYM DOOR JAMB (SIM @ HEAD)**
13008/X_A204-1 SCALE: 0 3" 6"

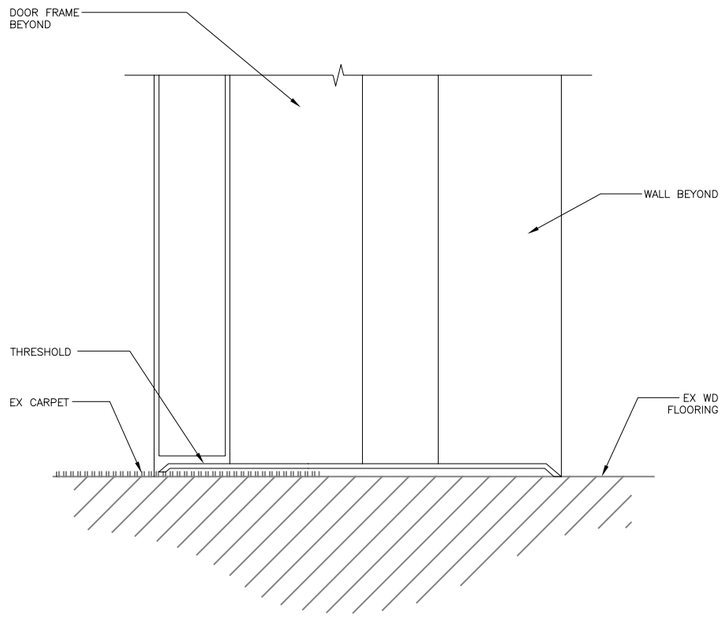

2 **GYM DOOR SILL DETAIL**
13008/X_A204-2 SCALE: 0 3" 6"

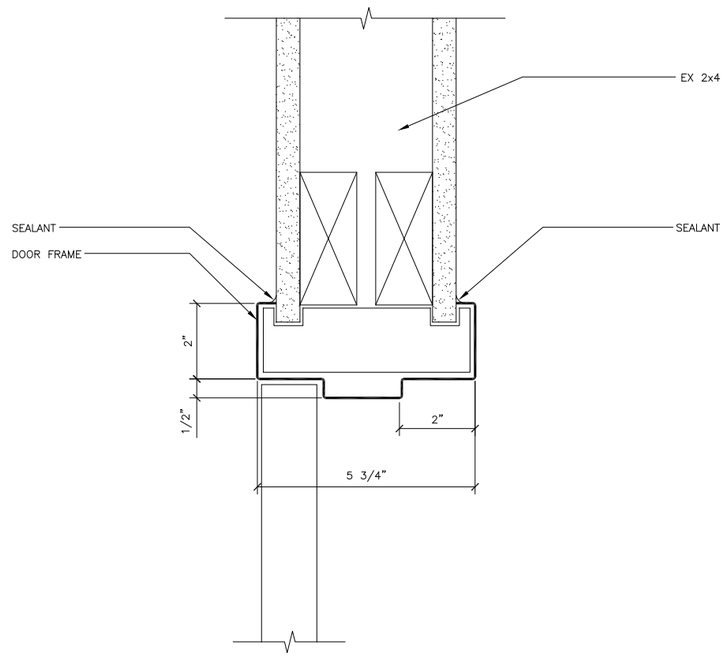

3 **DOOR HEAD DETAIL (SIM @ JAMB)**
13008/X_A204-3 SCALE: 0 3" 6"

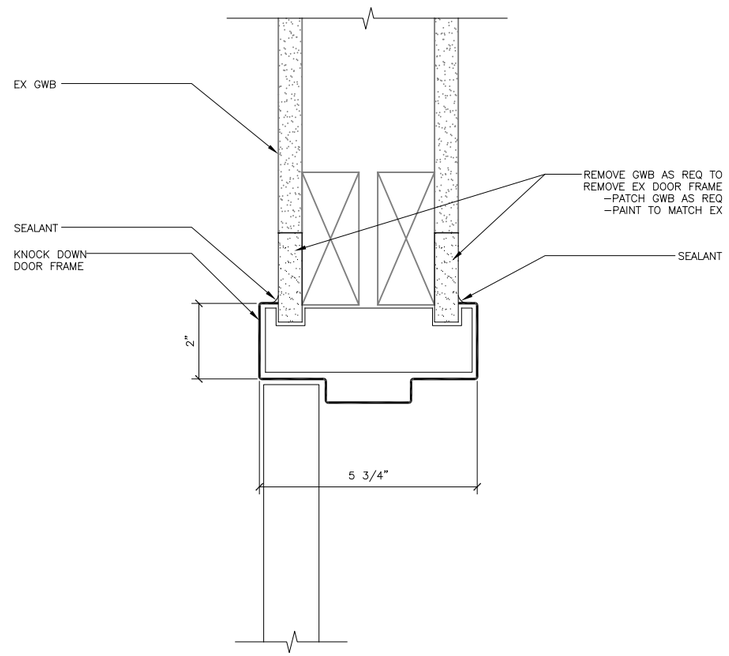

4 **DOOR HEAD DETAIL (SIM @ JAMB)**
13008/X_A204-4 SCALE: 0 3" 6"

Jensen Yorba Lott Inc.
522 West 10th Street
Juneau, Alaska 99801
phone 907-586-1070
fax 907-586-3959
jensenyorbalott.com

STATE OF ALASKA
JOANN E. LOTT
Jun. 7, 13
REGISTERED PROFESSIONAL ARCHITECT

Haines Borough
HAINES GYM, POOL, & CHILKAT CENTER DOORS & HAINES GYM MAT HOIST
Haines, Alaska

REVISIONS
1 .
2 .
3 .

SHEET TITLE
DOOR TYPES, DETAILS, HARDWARE & DOOR SCHEDULE

DATE: **06-07-2013**
FILE: **13008**

A204

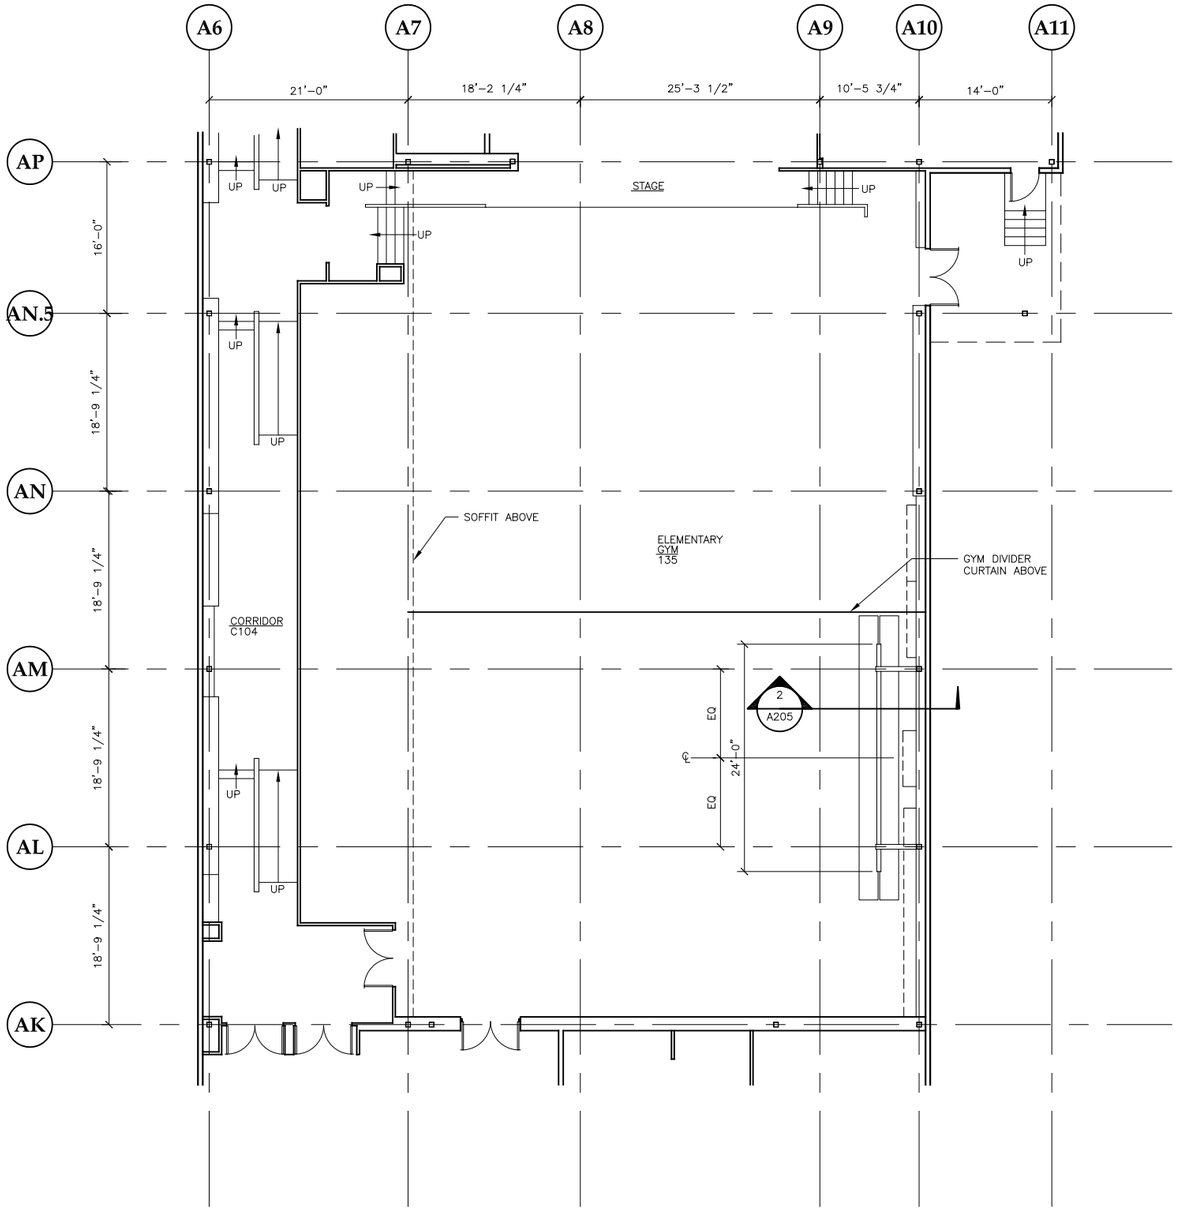

1 **GYM FLOOR PLAN**

SCALE: 0 4' 8' 16'

PROJECT NORTH

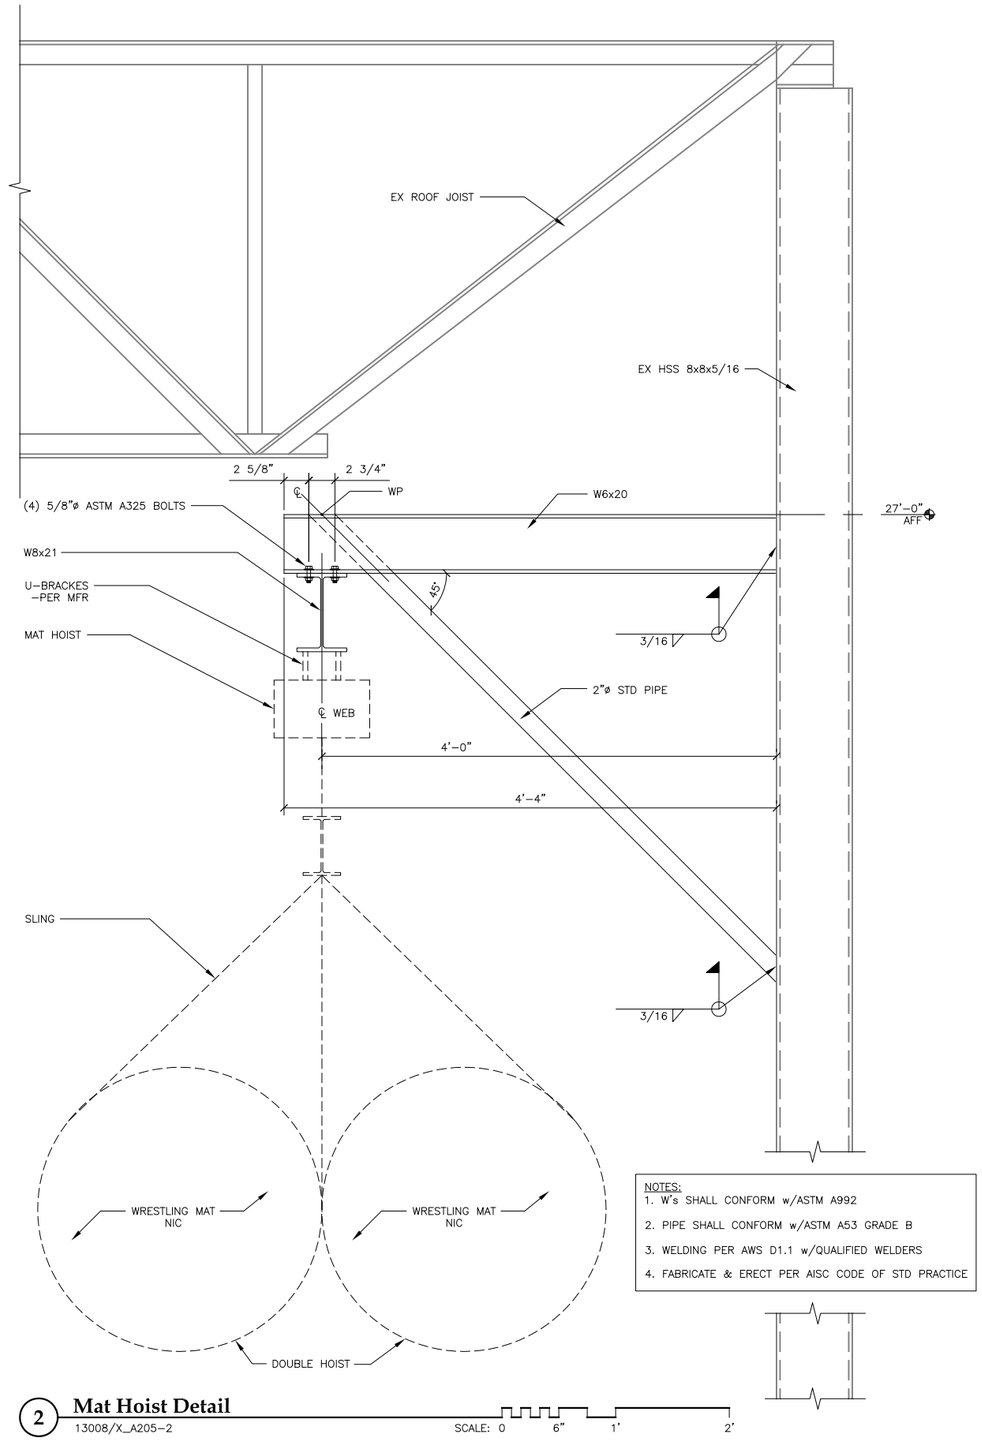

NOTES:
1. W's SHALL CONFORM w/ASTM A992
2. PIPE SHALL CONFORM w/ASTM A53 GRADE B
3. WELDING PER AWS D1.1 w/QUALIFIED WELDERS
4. FABRICATE & ERECT PER AISC CODE OF STD PRACTICE

2 **Mat Hoist Detail**

13008/X_A205–2

SCALE: 0 6" 1' 2'

Jensen Yorba Lott Inc.

522 West 10th Street
Juneau, Alaska 99801
phone 907-586-1070
fax 907-586-3959
jensenyorbalott.com

STATE OF ALASKA — JOANNE E. LOTT — Jun. 7, 13 — NO. AA806 — REGISTERED PROFESSIONAL ARCHITECT

STATE OF ALASKA — Christopher Gianotti — June 7, 2013 — CE–7559 — REGISTERED PROFESSIONAL ENGINEER

Haines Borough
HAINES GYM, POOL, & CHILKAT CENTER DOORS & HAINES GYM MAT HOIST
Haines, Alaska

REVISIONS
.
.
.

SHEET TITLE
GYM FLOOR PLAN

DATE: **06-07-2013**
FILE: **13008**

A205